
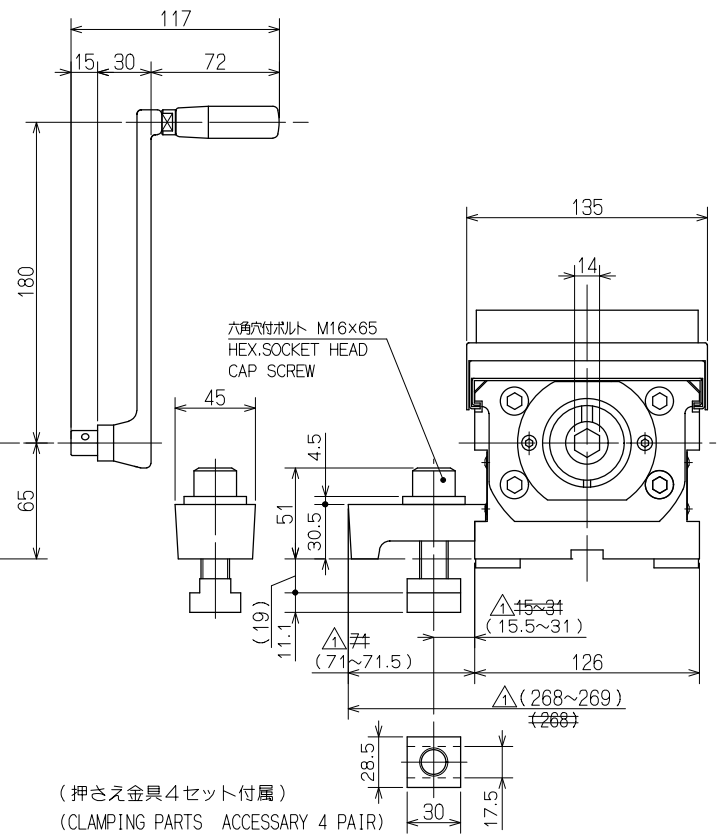
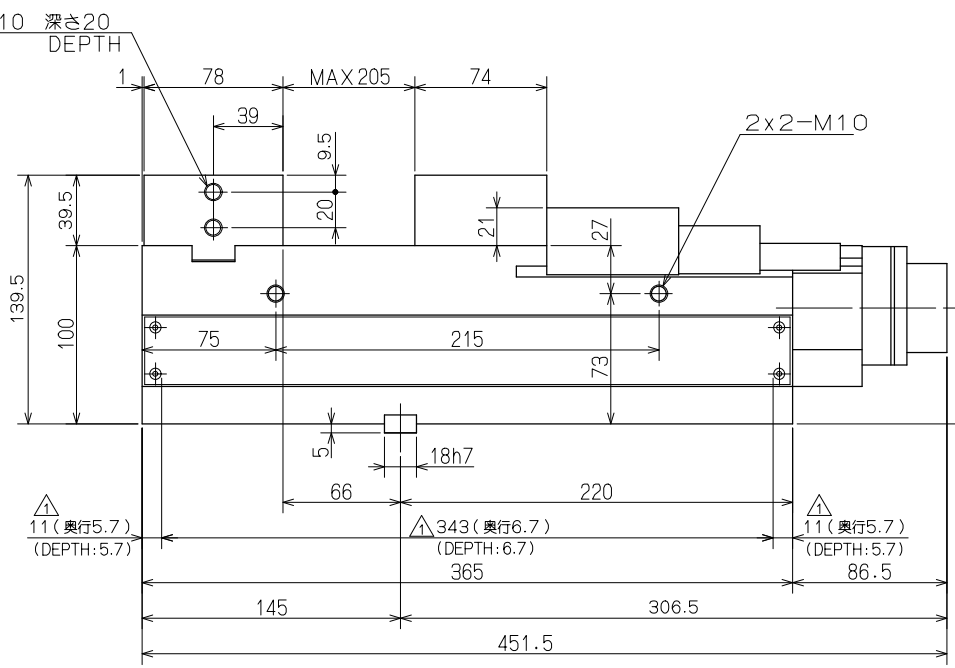
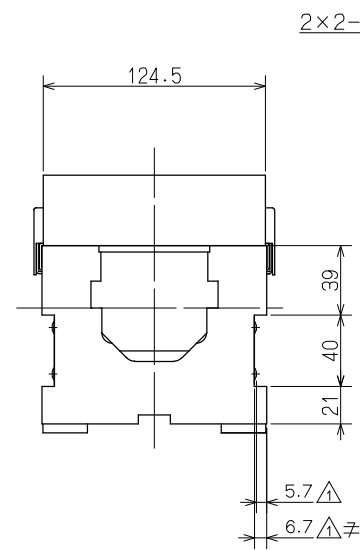


CUSTOMER		
MOD. NO.	D A T E	REASON OF REVISION
1	25.09.04	ADJUSTMENT (Δ8 PLACES)

仕様 SPECIFICATIONS	
口金の開き CLAMPING RANGE	0~205mm
締付トルク TIGHTENING TORQUE	
締付けレンジ CLAMP RANGE	0 8KN 1 16KN 2 28KN 3 40KN
製品質量 MASS OF POWER VISE	35kg

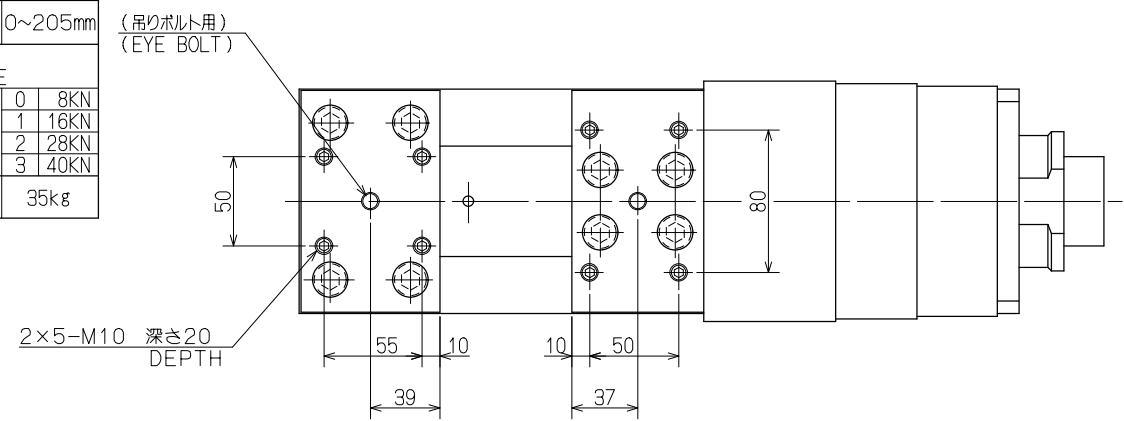

図面に記入のない寸法の一般公差			
寸法区分 mm	切削加工 穴明中心	板金加工 製缶加工	鍛造品 鍛造品
1以上 4以下	±0.1	±0.3	±0.5
4を超え 16以下	±0.2	±0.5	±0.7
16 63	±0.3	±0.7	±0.9
63 250	±0.5	±1.2	±1.5
250 1000	±0.8	±2.0	±2.5
1000 2000	±1.0	±2.5	±3.5
2000 5000	±1.5	±3.5	±5.0

注記 NOTE

- 1) Oレンジは増力機構なしの締付となりますので締付力は許容量を示します。
O-RANGE MEANS CLAMP THAT THERE IS NO A FORCE INCREASING MECHANISM.
CLAMPING FORCE SHOWS AN ALLOWANCE VALUE.

CAREER	61M3316664		SCALE	TYPE	VQX125N	WEIGHT	kg
MANAGER	CHIEF	DRAWN BY	1:3 3RD ANGLE	NAME	POWER VISE		
		N. SA NADA			VQX125N ガイキ VQX125N OUTSIDE VIEW		
KITAGAWA IRON WORKS CO., LTD.		DATE	DRW NO.	61M	39	6444	△1
		07.09.28					