


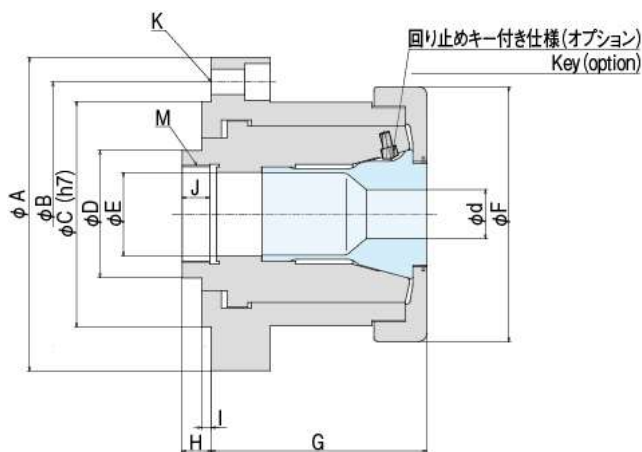

2021年1月よりSADチャックは“スリーブ内径ネジ無”仕様に順次モデルチェンジいたします。(オプション対応となります。)

項目 \ 型式	SAD-25D	SAD-40D	SAD-50D	SAD-65D	SAD-80B ^{*1}	SAD-90 ^{*1}	SAD-120 ^{*1}
d(max)	26	42	51	67	82	93	120
A	120	160	165	200	265	285	340
B	100	135	140	170	235	245	300
C	85	115	120	145	190	210	250
D	48	65	77	95	115	125	180
E	26.5	42.5	51.5	68	84	95	125
F	88	130	130	160	205	235	265
G	85	110	120	125	165	175	220
H(max)	20	18	18	23	23.5	24	14
H(min)	16.5	13	13	18	18	18	8
I	8	5	6	8	10	10	10
J	14	14	14	15	20	20	23
K	6-M10	6-M12	6-M12	6-M16	6-M16	6-M20	6-M20
M	M34×P1.5	M50×P1.5	M62×P1.5	M75×P1.5	M100×P2.0	M110×P1.5	M140×P2.0
最高推力 kN(kgf)	23.52 (2400)	30.38 (3100)	39.2 (4000)	44.1 (4500)	49 (5000)	53.9 (5500)	53.9 (5500)
把握力 kN(kgf)	54.09 (5520)	69.87 (7130)	90.16 (9200)	101.43 (10350)	102.9 (10500)	113.19 (11550)	107.8 (11000)
許容回転数 min ⁻¹	10000	8000	8000	6000	3000	3000	2000
GD ² N·m ² (kgf·m ²)	0.25 (0.026)	1.02 (0.104)	1.29 (0.132)	2.99 (0.305)	12.35 (1.26)	19.99 (2.04)	49.69 (5.07)
重量 kg	4.5	10	11	17	40	55	90
					*1 受注生産品 (made to order)		